

Designed with Elegance.

CPQ6

It delivers high-speed, low-noise performance with quick and effortless media replacement, making it ideal for demanding business environments. Equipped with a precision auto-cutter and intelligent paper-out detection, it ensures smooth and uninterrupted operation. With support for high-quality graphics and hardware font printing

Specification

Printing method	Direct thermal
Printing speed	300mm/s
Paper width	79.5±0.5mm
Roll paper	80mm
Paper thickness	0.06~0.08mm
Column capacity	576 dots/line 512 dots/line (80mm)
Line space	3.75mm (changeable using commands)
Character size	ANK, Font A: 12×24 dots Font B: 9×17 dots Simplified/traditional Chinese: 24×24 dots
Bar code	UPC-A/UPC-E/EAN13 /JAN8 EAN8 / CODABAR/ITF/CODE39/CODE93/CODE128
Code page	PC347 (Standard Europe) 、Katakana PC850 Multilingual PC860 Portuguese) 、PC863 Canadian-French) 、PC865 Nordic West Europe Greek Hebrew East Europe Iran WPC1252 PC866 Cyrillic#2) 、PC852 Latin2) 、PC858 IranII Latvian Arabic
NV FLASH	256Kbytes
Input buffer	4096Kbytes
Power supply	DC 24V 2.5A
Cash drawer control	DC 24V 1A
Interface	USB USB+LAN USB+BLUETOOTH USB+Wifi
Auto cutter	Full/Partial(optional)
Reliability	Printing head life: 150 km Auto cutter life: 1 million cuts
Working environment	Temperature (0~45°C), humidity(10~80%)
Storage environment	Temperature (-10~60°C), humidity(10~90%)
Drivers	Win 7/Win 8/Win 8.1/Linux/OPOS
Command	Compatible with ESC/POS
Gross weight	1.1 kg
Dimension	140×130×133mm (D×W×H)



Auto Cutter



Buzzer



USB




Ethernet



Serial



DK port

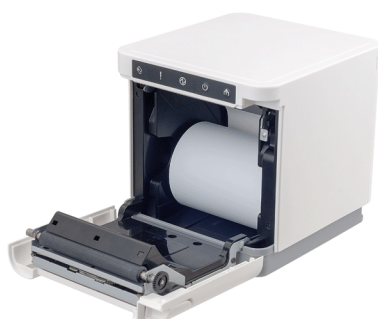

INDUSTRIAL APPLICATIONS



Retail



Hospitality



Transportation



Government



Direct Store
Delivery



Postal and
Courier Services



Field Service



Field Sales



QR code



1D Barcode



High Speed



Easy load

